




Safety Grating

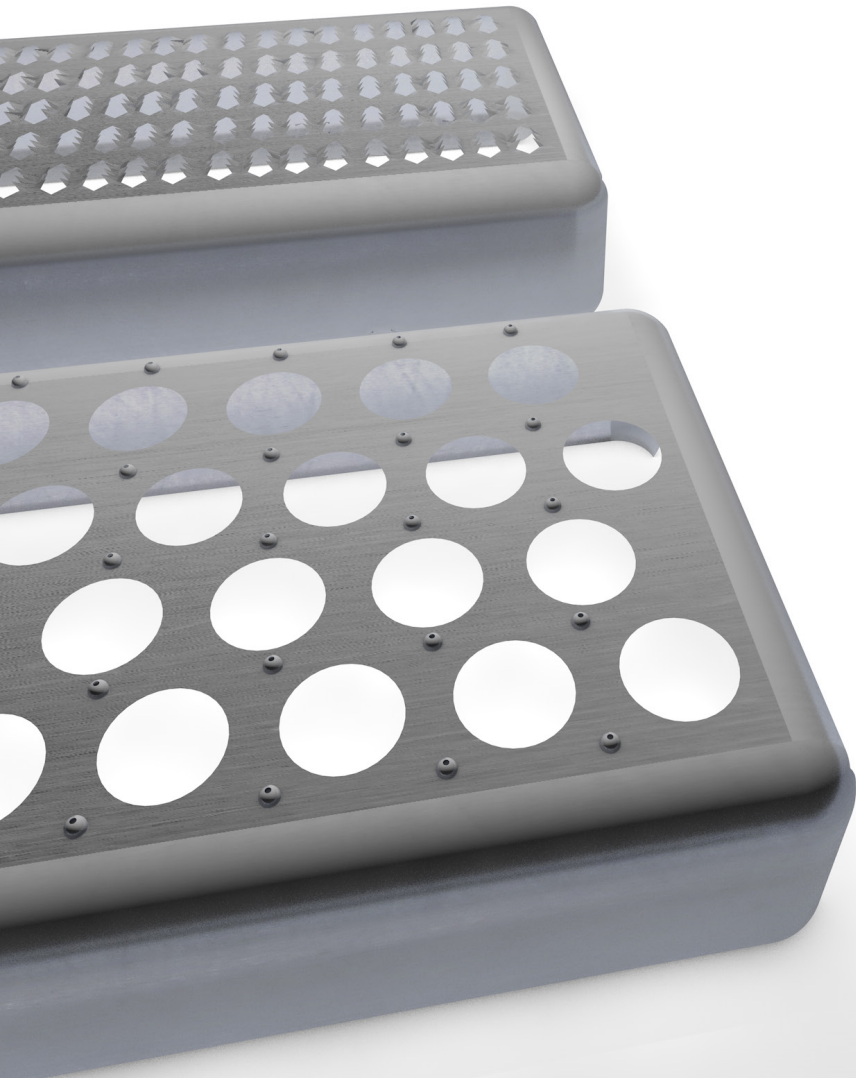

SAFETY GRATING

Safety Grating is manufactured with an increased open area and greater traction causing better slip resistance to prevent hazards. Mud, snow, grease, debris can easily fall thru preventing slippage. Safety Grating is available in different widths, lengths, and heights to suit your requirements. We offer diamond channel as well as round channel grating. The standard length is 10' and 12', custom lengths are available and typically take 2-3wk lead time for custom fabrication. In addition, we offer ladder rung and dimple plate. As always, we can offer custom fabricated sizes to meet your safety grating needs.

Measuring And Ordering Material

1. Alloy desired(SS,Alum,Galv., Plain Steel)
2. Gauge of material and channel height
3. Dimensions of panels

Side Channels Available	Gauge & Type Available	Product Widths Available
1 1/2"	14 GA Galvanized Steel	4 3/4"
2"	12 GA Galvanized Steel	7"
2 1/2"	.080 Aluminum 5052-H32	9 1/2"
3"	.100 Aluminum 5052-H32	11 3/4"
4 1/2" (Walkway)	*16 GA Type 304 Stainless Steel	18 3/4" 24"

STANDARD LENGTHS - 10' & 12'

Plain HRP & O Steel available upon request and special quotation.

Type 316 Stainless available upon request and special quotation.

Special fabrication cutting or specialty configurations available upon request and special quotation.



PSM TEXAS

1310 Laurel Street
San Antonio, TX 78201

PSM OKLAHOMA

7287 E. Hwy. 88
Oologah, OK 74053

CONTACT US

Toll Free (866) 596-7537
Fax: (866) 896-7537
www.psm-mfg.com